


VALVOLE A SFERA MOTORIZZATE

MOTORIZED BALL VALVES

2 VIE

-WAYS

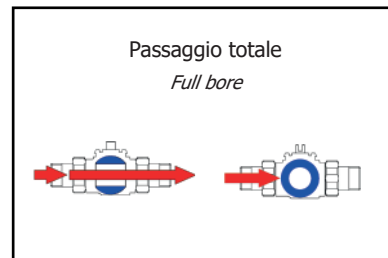

| Corpi valvola - Valve bodies | Attacchi Connections | Kv (m ³ /h) | Ø | Codice Code |
|--|--|-------------------------|--------------|---------------|
| | Femmina <i>Female</i> | 12,5 | 1/2" | 632 F |
| | | 15,6 | 3/4" | 602 F |
| | | 31,3 | 1" | 612 F |
| | | 50,0 | 1" 1/4 | 622 F |
| | | 98,0 | 1"1/2 | 642 F |
| | Maschio <i>Male</i> | 12,5 | 3/4" | 602 M |
| | | 15,6 | 1" | 612 M |
| | | 31,3 | 1" 1/4 | 622 M |
| | | 50,0 | 1" 1/2 | 642 M |
| | Femmina - Bocchettone <i>Female - Pipe-unions</i> | 12,2 | 1/2" | 632FB |
| | | 15,1 | 3/4" | 602FB |
| | | 30,6 | 1" | 612FB |
| | | 49,1 | 1" 1/4 | 622FB |
| | Bocchettone <i>Pipe-unions</i> | 96,0 | 1"1/2 | 642FB |
| | | 12,0 | 1/2" | 632 B |
| | | 14,9 | 3/4" | 602 B |
| 30,0 | | 1" | 612 B | |
| 48,2 | | 1" 1/4 | 622 B | |
| A compressione con ogive in ottone per tubo rame <i>Compression fittings with brass olives for copper pipes</i> | | BRITISH STANDARD | | |
| | | 11,0 | 15 | 632 BE |
| | | 12,0 | 16 | 602 BE |
| | | 13,0 | 18 | 642 BE |
| | | 14,9 | 22 | 612 BE |
| 30,0 | 28 | 622 BE | | |
| | | IRISH STANDARD | | |
| | | 12,0 | 1/2" | 632 BI |
| | | 14,9 | 3/4" | 602 BI |
| 30,0 | 1" | 612 BI | | |

ACCESSORI *Accessories*

| | Ø M Ø M | Ø F/ BOC. Ø F/ P.U. | Codice Code |
|--|---------------------|------------------------|----------------|
| Maniglia per azionamento manuale <i>Handle for manual drive</i> | Tutti <i>All</i> | | HM2 |
| Guscio di coibentazione in polietilene reticolato espanso <i>Insulation shell made off crossed linked polyethylene foam</i> | 3/4"-1" | 1/2" - 3/4" | GC02 |
| | 1"1/4 | 1" | GC12 |
| | 1"1/2 | 1"1/4 | GC22 |
| | - | 1"1/2 | GC42 |

