Temporizzatore luci scale multi funzione, multi tensione

Multi-function, multi-voltage staircase timer

IP20

-10° +50°

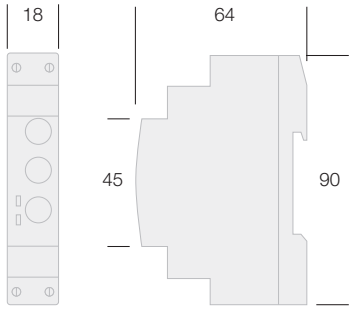

Alimentazione multi-tensione 12/240 Vac/Vdc.
Frequenza nominale 50-60 Hz
Range operativo frequenza 0-500 Hz
L'ingresso pulsante esterno accetta segnali con tensione 12/240 Vac/Vdc
Compatibilità con sensori NPN o PNP
Autoconsumo 0,5 W
Tre selettori rotativi frontali che permettono di impostare:
1) Una delle 10 modalità di funzionamento
2) La scala temporale con un ampio campo di regolazione (0,3 s – 10 giorni) suddiviso in 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 1 giorno, 10 giorni. Sono inoltre disponibili le posizioni ON (sempre acceso) e OFF (sempre spento).
3) Regolazione fine della temporizzazione in percentuale
Elevata stabilità e precisione nelle temporizzazioni
Uscita relè a contatto pulito
Configurazione contatti 1 contatto in scambio (SPDT)
Portata contatti 10 A – 250 Vac.
Circuito interno operante a bassa tensione per garantire la massima sicurezza
Installazione su guida DIN da 35 mm
Ingombro 1 modulo DIN
Morsetti di collegamento a vite con serraggio a carrello
Sezione conduttori da 0,3 a 2.5 mm²
Coppia di serraggio 0,8 Nm
Scocca in ABS autoestinguente V0

Multi-voltage power supply 12/240 Vac/Vdc
Nominal frequency 50–60 Hz
Operating frequency range 0–500 Hz
The external push-button input accepts signals with voltage from 12/240 Vac/Vdc
Compatible with NPN or PNP sensors
Power consumption 0.5 W
Three front rotary selectors allowing adjustment of:
1) One of 10 operating modes
2) Time scale with a wide adjustment range (0.3 s – 10 days), divided into 1 s, 10 s, 1 min, 10 min, 1 h, 10 h, 1 day, 10 days. ON (always ON) and OFF (always OFF) positions are also available.
3) Fine timing adjustment in percentage
High stability and precision in timing functions
Relay output with dry contact
Contact configuration 1 changeover contact (SPDT)
Contact rating 10 A – 250 Vac
Low-voltage internal circuit to ensure maximum safety
Installation on 35 mm DIN rail
Width 1 DIN module
Screw terminals with rising cage clamp
Conductor cross-section 0.3 to 2.5 mm²
Tightening torque 0.8 Nm
ABS self-extinguishing V0 case

CODICE	INCANDESCENZA	ALOGENA	LED 230V	LED 12/24 Vdc	TIPO	PESO
CODE	INCANDESCENT	HALOGEN	230V LED	LED 12/24 Vdc	TYPE	WEIGHT
	Watt	Watt	Watt	Watt		gr
TM101DI	2000	2000	500	300	Unipolare in scambio (SPDT) 10A	80